

SU7 Cantilever Umbrella

(360° rotation)




FRAME WARRANTY



FABRIC WARRANTY



HIGH UV PROTECTION

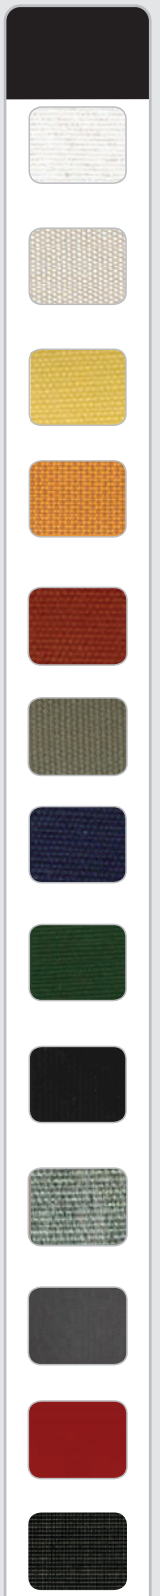


- 0DULHUDHSRHUFRDWHDOPLLPVWDLOHVVVVWHHODRWHURFRUURVLHPDWHULDOV
- %ULOOLDWLWHUDWLRDODDULLHVL
- 8SRLRHHDVVOLLPRHPHW
- (ffs pi e y e m i itps ir
- 8PEUHOODURWDWHV
- UDEOHHDWDOPLLPDVM
- 3UHPLPVROWLRHFUOLF&DDV&123SI
- &RORUIDVWHVV
- :HLWVP
- :DWHUSURRIUDWLPPDWHUFROP


FIXING OPTIONS

- In-ground Anchor
- Portable Base
- Surface Plate
- Wall Fixing

ROTATING

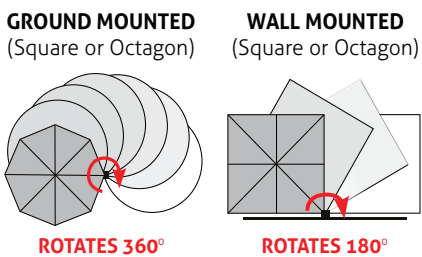

SIZES

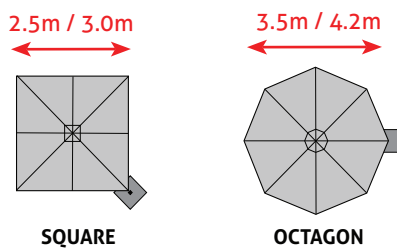

GAS STRUT



MAST



* The 4.2m model comes standard in these colours only. Other colours are available for a surcharge.




Phone: 0438 574 228
 Email: info@sydney-shade.com.au
 Web: www.sydney-shade.com.au

SU7 Cantilever Umbrella

(360° rotation)

Key Dimensions (excludes portable base - portable base increases height dimensions by 12cm):

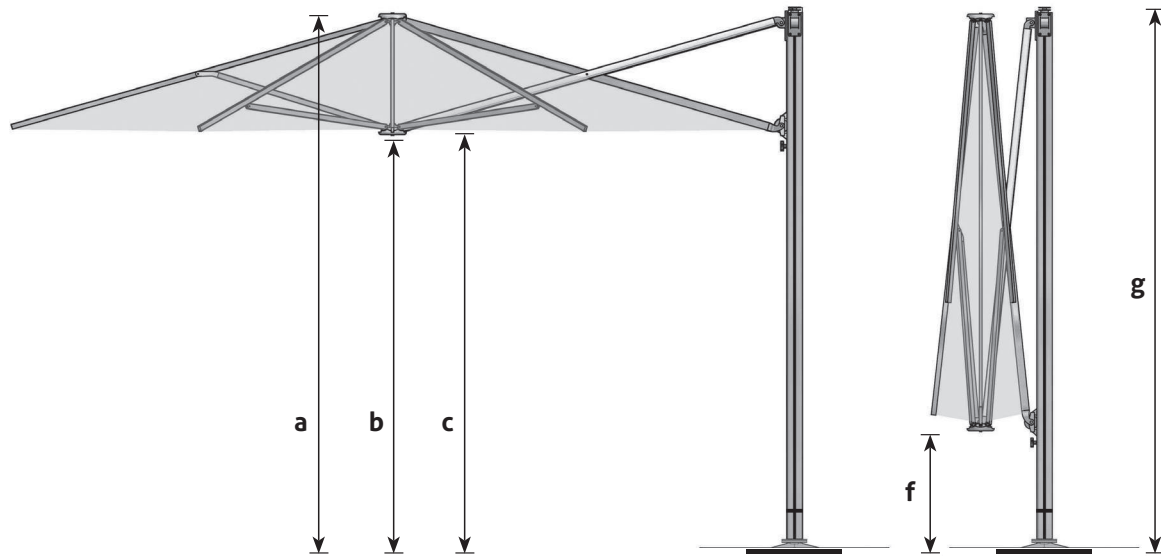


	2.5m Square	3.0m Square	3.5m Octagon	4.2m Octagon
Dimensions of open umbrella				
a: Total height to top of canopy (cm)	+/- 292	+/- 292	+/- 292	+/- 292
b: Distance from ground to central frame hub (cm)	+/- 226	+/- 224	+/- 226	+/- 224
c: Height to lower outer edge of canopy (cm)	+/- 231	+/- 229	+/- 231	+/- 229
d: Distance from centre of mast to outside edge of canopy (cm)**	+/- 257	+/- 307	+/- 363	+/- 436
e: Diagonal distance from centre of mast to opposite / furthest corner of umbrella (diameter) (cm) **	+/- 363	+/- 436	+/- 363	+/- 436
Dimensions of closed umbrella				
f: Distance from ground to central frame hub (cm)	+/- 92	+/- 56	+/- 92	+/- 56
g: Overall height of umbrella to top of mast cap (cm)	+/- 290	+/- 290	+/- 290	+/- 290

** Refer plan diagrams in table.


INSTALLATION OPTIONS:



IN-GROUND ANCHOR



SURFACE PLATE

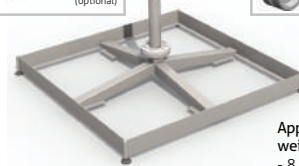

PORTABLE BASE
Note: Requires concrete pavers (not supplied) for anchoring weight

Approximate weight with:
- 8 pavers 130kg
- 12 pavers 185 kg



WALL FIXING